


Dimensions



Specification

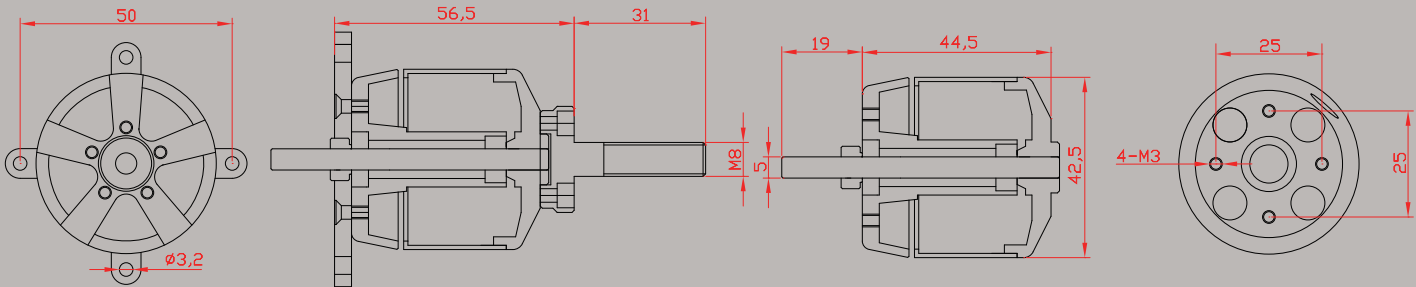

Dualsky Xmotor CA2 Series	XM4250CA			
Item No.(商品编码)	55137	55138	55139	55326
Model - Turns(马达转速)	XM4250CA-5	XM4250CA-6	XM4250CA-7	XM4250CA-10
RPM/V(KV)(KV值)	1020	840	720	510
Stator Diameter(定子直径)	35	35	35	35
Magnet length(磁铁长度)	20	20	20	20
Shaft diameter(轴径)	5	5	5	5
Mountingholes pitch(安装孔距)	25/25	25/25	25/25	25/25
Weight(g)(重量)	200	200	200	200
Resistance(Ri)(mOhm)(电阻)	13	18	24	42
Idle Current(Io) @10V (A)(空载电流)	3.43	2.51	1.97	1.50
No.of Cells(LiPo)(电池节数)	2..3	3..4	3..5	6
Max. EfficiencyCurrent[A](效率电流)	40	40	40	40
Max. Burst Current (15s)[A](最大电流)	65	65	65	65
Max. Power(15s)(最大功率)	900W	900W	900W	900W
Input Connectors[mm](金插)	DB4	DB4	DB4	DB4
Recommended ESC(推荐调速器)	XC6018BA	XC6018BA	XC6018BA	XC6018BA
Prop. Range(螺旋桨)	13x6.5(64A)	13x6.5(64A)	13x6.5(64A)	14x7, 15x6
App. Class(适用机种)	.50 4- storke	.32-.40 2- storke		6S Lipo